

# DOGE



**TIPO:**

Elettropompa centrifuga ad alta portata costruita in materiale termoplastico.

**UTILIZZO CONSIGLIATO:**

Prodotto specifico per vasche idromassaggio.

**TEMPERATURE MAX DI UTILIZZO:**

35 °C (acqua), 40 °C (ambiente).



**TYPE:**

High flow centrifugal electric pump made of thermoplastic material.

**SUGGESTED APPLICATIONS:**

Product specifically designed for whirlpool baths.

**MAX OPERATING TEMPERATURES:**

35 °C / 95 °F (water), 40 °C / 104 °F (environment).



**TYPOLOGIE:**

Électropompe centrifuge d'un débit élevé construite en matériel thermoplastique.

**USAGE CONSEILLÉ:**

Produit spécifique pour baignoires hydromassage.


**TEMPERATURES MAX D'UTILISATION:**

35 °C (eau), 40 °C (environnement).

**CARATTERISTICHE COSTRUTTIVE - CONSTRUCTION FEATURES - CARACTERISTIQUE DE CONSTRUCTION**

Corpo pompa - Pump body - Corps de pompe	Polipropilene	Polypropilene	PP30VF
Supporto motore - Motor bracket - Support moteur	Polipropilene/Ryton	Polypropilene/Ryton	Polypropilene/Ryton
Girante - Impeller - Turbine	Noryl®	Noryl®	Noryl®
Tenute meccaniche - Mechanical seal Tenues d'étanchéité	Allumina carbon grafite	Alumina carbon graphite	Alumina charbon graphite
Classe isolamento - Insulation class - Classe d'isolation	F	F	F
Classe di protezione - Protection class - Classe de protection	IPX5	IPX5	IPX5


Pump model	Hp	Kw	A ~ 1	$\mu$ F	Q l/min	0	50	100	150	200	250	300
	(P2)	(P2)	230V 50 Hz		Q m <sup>3</sup> /h	0	3	6	9	12	15	18
DOGE 500	0,5	0,37	2,2	8	H/m	7,8	6,7	5,4	3,8	2,3	0,7	-
DOGE 700	0,7	0,5	2,8	12		10,3	9	7,6	6	4,3	2,3	-
DOGE 800	0,8	0,6	3,8	16		10,7	9,6	8,4	7	5,4	3,8	1,6

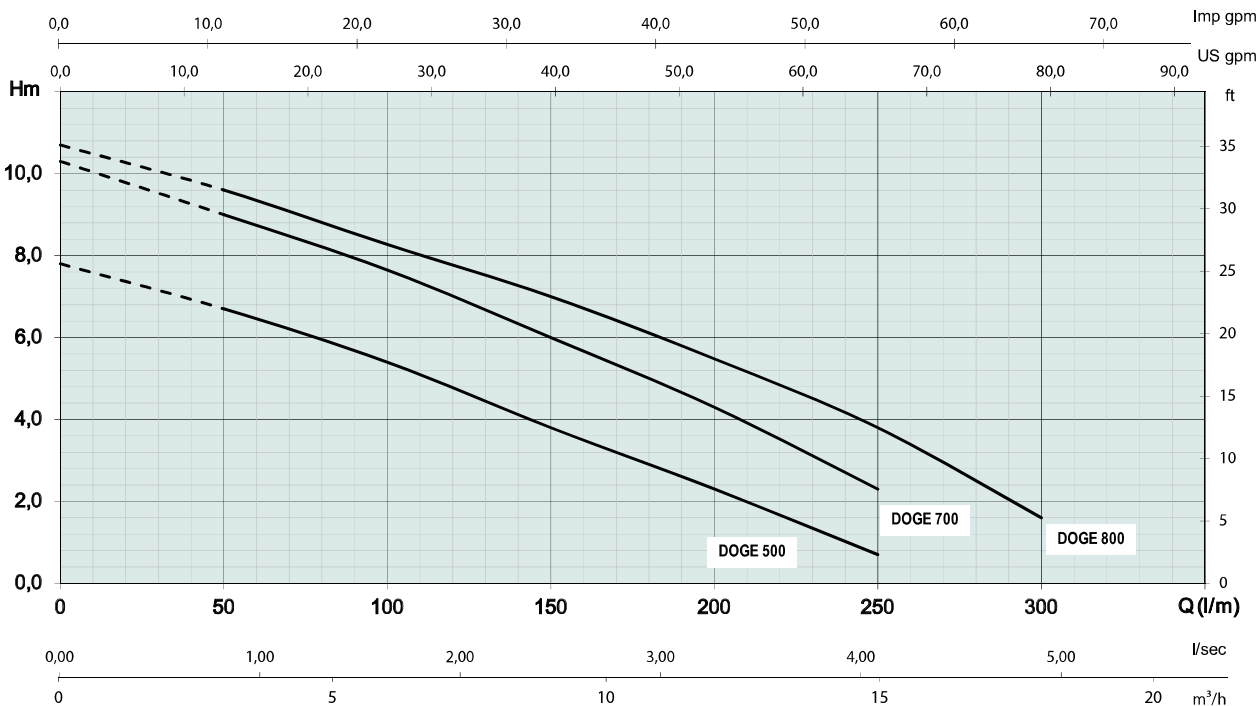

Pump model	A	B	C	D	E	F	G	H	I	L	M	N	O	Weight kg / lbs
DOGE 500	119	99	32,7	169	63	68	80	136	284	157	72	6,2	14	4,5 / 10,0
DOGE 700	119	99	32,7	169	63	68	80	136	284	157	72	6,2	14	5,5 / 12,0
DOGE 800	119	99	32,7	169	63	68	80	136	284	186	72	6,2	14	6,0 / 13,0



Pump model	H	X	Y	Q
DOGE	160	80	120	72



Pump model	H	X	Y	Q
DOGE	100	83	113	60

